


BIS Threaded Rod

fixing to rail, wall plates, etc.

(K 55 10)

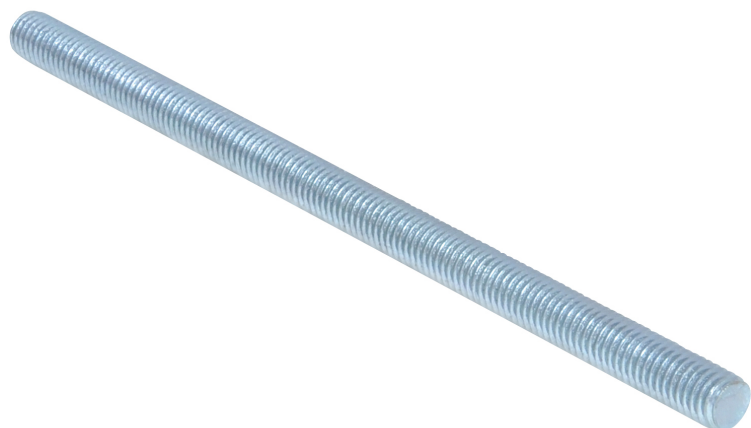


Features and benefits

- according to DIN 976-1
- material: steel, strength class 4.8
- zinc plated

Part No.	Type	Thread (M)	L	BndS
6303006	DIN 976-1	M6	1 m	100
6303206	DIN 976-1	M6	2 m	50
6303306	DIN 976-1	M6	3 m	50
6303008	DIN 976-1	M8	1 m	50
6303208	DIN 976-1	M8	2 m	25
6303308	DIN 976-1	M8	3 m	25
6303010	DIN 976-1	M10	1 m	25
6303210	DIN 976-1	M10	2 m	20
6303310	DIN 976-1	M10	3 m	20
6303012	DIN 976-1	M12	1 m	20
6303212	DIN 976-1	M12	2 m	15
6303312	DIN 976-1	M12	3 m	15
6303014	DIN 976-1	M14	1 m	10
6303016	DIN 976-1	M16	1 m	10
6303216	DIN 976-1	M16	2 m	10
6303316	DIN 976-1	M16	3 m	1
6303020	DIN 976-1	M20	1 m	5
6303024	DIN 976-1	M24	1 m	5

M10 tested for fire safety.

M12 tested for fire safety.



Complementary

- BIS Stud Connector
- BIS dB-FIX® 80 Stand-off Fixing Kit